
# SteelLinx Metal Roofing

### Metal roofing isn't just for barns anymore.

From tool sheds to residential homes to industrial warehouses, metal is becoming the material of choice for many roofing and siding applications. Metal roofs are favored for their fire-resistant qualities, longevity, and speed of installation – in most cases, by a qualified metal-roofing contractor. They are also surprisingly lightweight and are great at reflecting heat from the sun.

# **Terminology**

- Profile Roofing: Provides versatility with an updated look. This can be used on a roof, cabin, or barn, and is durable enough to meet the needs of any location.
- **Loc Seam:** Long-lasting roofing alternative that is a low-maintenance steel panel, providing strength and durability.
- **Corrugated:** Galvanized coating protects from wear and tear from heavy machinery and livestock damage.
- **5-V:** Galvanized coating is great for climates affected by moisture and heat. Resists rust and corrosion.

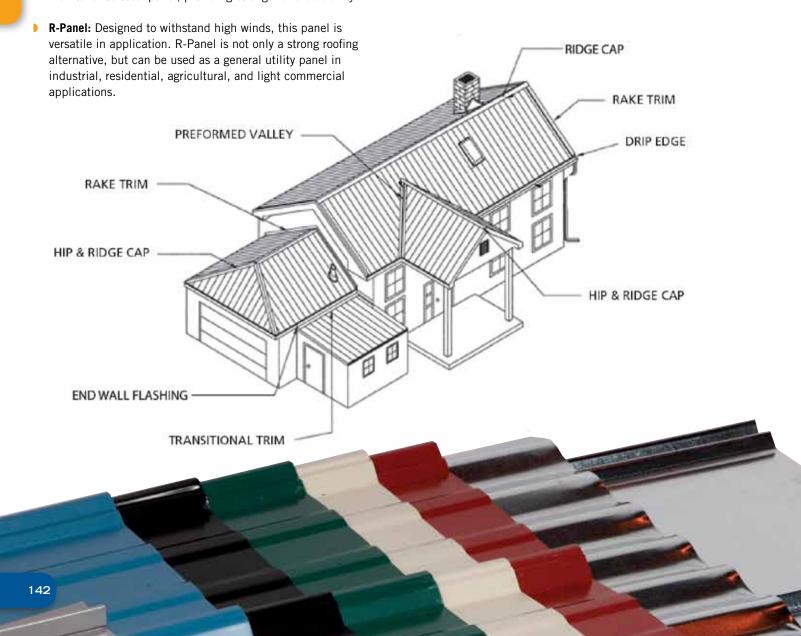

# **Metal Roofing Colors**

### **COLORS**



Colors shown may vary slightly from actual material. Request metal color samples for true representation.

# **Stocked Metal Roofing**

# 5V Metal Roofing - 29 Gauge 8'-18', 30 Gauge 8'-16'

IIEM#	SIZE	DESCRIPTION
131998	26" X 8'	29GA GALVANIZED 5-V CRIMP
184971	26" X 10'	29GA GALVANIZED 5-V CRIMP
155906	26" X 12'	29GA GALVANIZED 5-V CRIMP
181852	26" X 14'	29GA GALVANIZED 5-V CRIMP
153375	26" X 16'	29GA GALVANIZED 5-V CRIMP
109133	26" X 18'	29GA GALVANIZED 5-V CRIMP
429735	26" X 8'	30GA GALVANIZED 5-V CRIMP
429737	26" X 10'	30GA GALVANIZED 5-V CRIMP
429739	26" X 12'	30GA GALVANIZED 5-V CRIMP
429740	26" X 14'	30GA GALVANIZED 5-V CRIMP
429741	26" X 16'	30GA GALVANIZED 5-V CRIMP

## Corrugated Metal Roofing - 30 Gauge 2-1/2", 8'-12'

ITEM #	SIZE	DESCRIPTION
642963	26" X 8'	30 GA GALVANIZED 2-1/2" CORRUGATED
642965	26" X 10'	30 GA GALVANIZED 2-1/2" CORRUGATED
642967	26" X 12'	30 GA GALVANIZED 2-1/2" CORRUGATED



ITEM #	SIZE	DESCRIPTION
190091	10" X 10'	GALVANIZED RIDGE ROLL PLAIN
290351	12" X 10'	GALVANIZED RIDGE ROLL PLAIN
462736	14" X 10'	GALVANIZED RIDGE ROLL PLAIN








## **PS-9 Residential Trim**


AVAILABLE IN: ASH GRAY, BRIGHT RED, BURGANDY, BURNISHED SLATE, CHARCOAL, COCOA BROWN, COUNTRY RED, EMERALD GREEN, FOREST GREEN, HAWAIIAN BLUE, IVORY, LIGHTSTONE, POLAR WHITE, REGAL BLUE, SAHARA TAN, STEALTH BLACK PAINTED

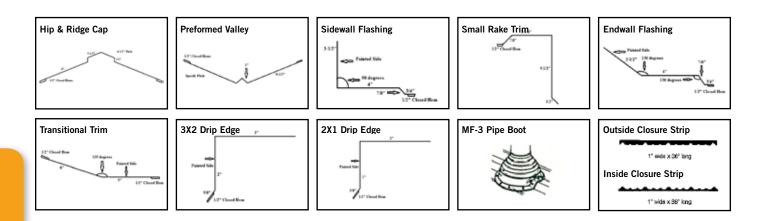



# **PS-9 Post Frame Trim Guide**

AVAILABLE IN: ASH GRAY, BRIGHT RED, BURGANDY, BURNISHED SLATE, CHARCOAL, COCOA BROWN, COUNTRY RED, EMERALD GREEN, FOREST GREEN, HAWAIIAN BLUE, IVORY, LIGHTSTONE, POLAR WHITE, REGAL BLUE, SAHARA TAN, STEALTH BLACK PAINTED

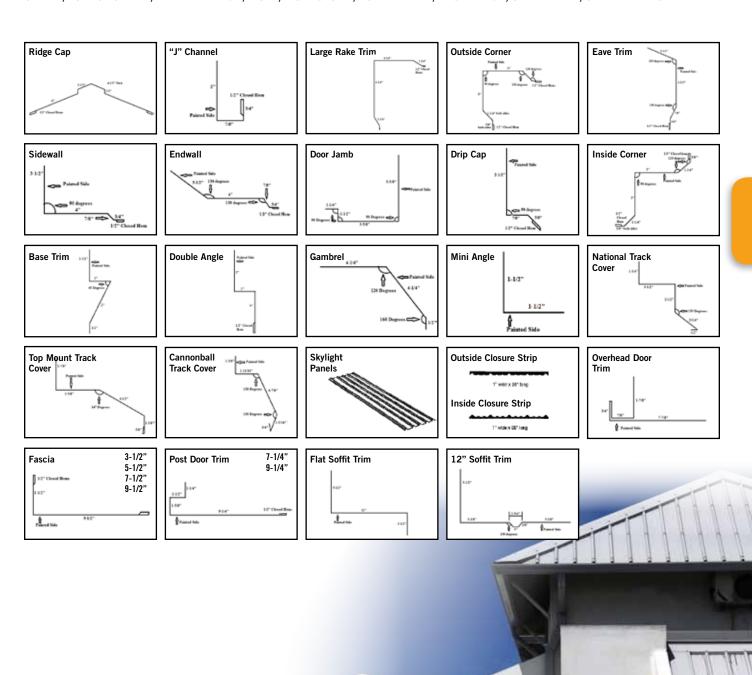

\*CUSTOM TRIMS AVAILABLE UPON REQUEST










**PS-12 Roofing Trim**AVAILABLE IN: ASH GRAY, BURNISHED SLATE, CHARCOAL, COCOA BROWN, COUNTRY RED, EMERALD GREEN, LIGHTSTONE, POLAR WHITE AND SAHARA TAN AND STEALTH BLACK

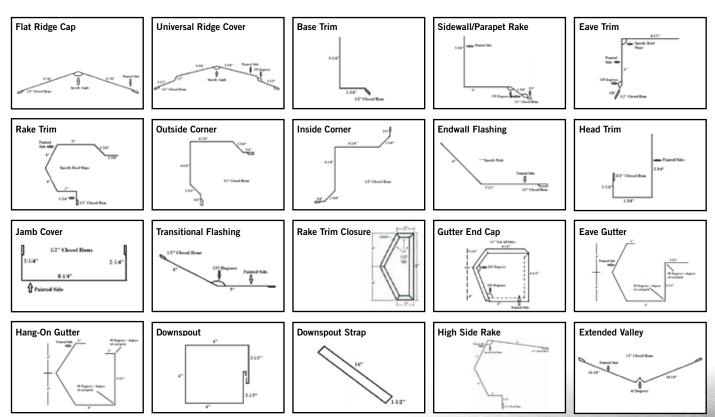


\*CUSTOM TRIMS AVAILABLE UPON REQUEST





SnapLinx Roofing Trim
AVAILABLE IN BURNISHED SLATE, CHARCOAL, COUNTRY RED, EMERALD GREEN AND BLACK OTHER COLORS AVAILABLE BY SPECIAL ORDER

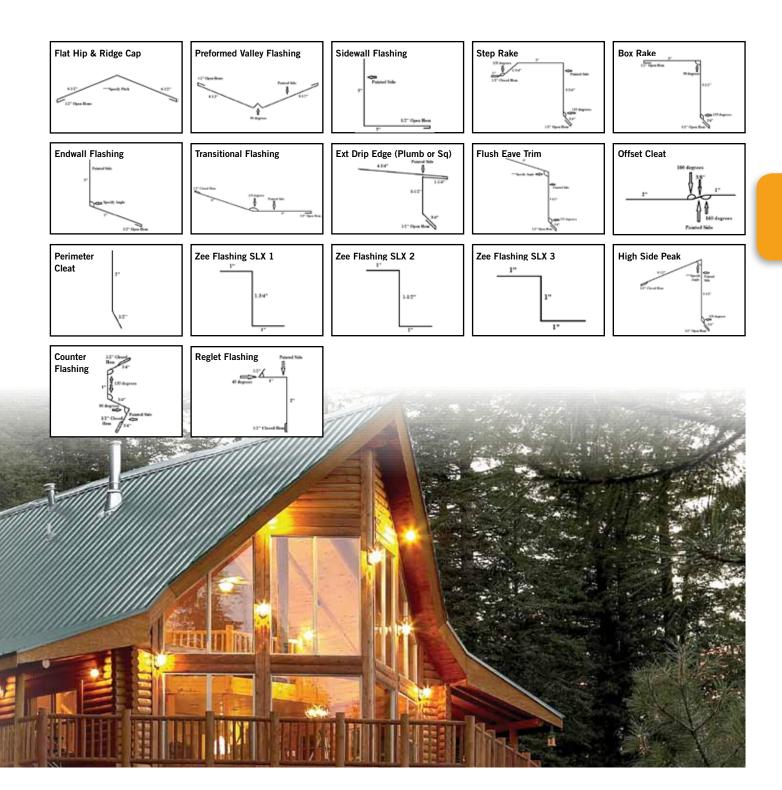






# SteelLinx Metal Roofing Profiles

### **Clean and contemporary**

Metal roofing materials are made primarily from aluminum and steel, but other materials, such as copper and alloys, are also used. Some sheet-style materials such as "standing-seam roofing" have a decidedly commercial look that is favored by architects for their clean, contemporary appearance.




### **PS-9**

- Available in 29 and 26 gauge
- Exposed fastener system
- ▶ 36" panel coverage, 3/4" rib height
- Trapezoidal rib on 9" center
- Minimum roof slope 3:12
- Offered with cool roof rated finished to reduce energy consumption
- Applies over open framing or solid substrate
- Perfect for agricultural, post frame, & residential applications
- ▶ 16 SMP color offerings to choose from
- 40-year limited warranty



### PS-12 & PS-12 PB

- Available in 26 gauge
- Exposed fastened metal building panel
- ▶ 36" panel coverage, 1-1/4" rib height
- Trapezoidal rib on 12" centers
- Minimum roof slope 1:12
- Offered with cool rated finished to reduce energy consumption
- Applies over open framing or solid substrate
- Perfect for light commercial applications
- 10 SMP color offerings to choose from
- 40-year limited warranty



### SnapLinx I

- Available in 26 or 24 gauge
- Concealed Fastener System with clip
- ▶ 15-3/4" coverage
- Available in striated or flat
- Offered with cool roof rated finished to reduce energy consumption
- ▶ 5 stock colors, other colors available by special order
- 40-year limited warranty



### SnapLinx II

- Available in 26 gauge or special order 24 gauge
- Architectural concealed direct-fastened roof panel
- Panel coverage of 15-3/4"
- 1" and 1-1/2" rib height
- Minimum roof slope 3:12
- Applies over solid substrate with 30# felt underlayment
- 5 stock colors, other colors available by special order; call for availability
- 40-year limited warranty
- Available in striated or flat
- Offered with cool roof rated finished to reduce energy consumption
- Perfect for residential or light commercial applications



### **5V Crimp**

- Available in 29 or 30 gauge galvanized steel
- Exposed fastener system, traditional "V" rib
- ▶ 24" panel coverage, 1/2" rib height
- Minimum roof slope 3:12
- Applies over solid substrate with 30# felt underlayment
- Painted panels available by special order
- ▶ 29 and 26 gauge galvalume and 26 gauge galvanized are available by special order



### **Corrugated Metal Roofing**

- Available in 30 gauge galvanized steel, 29 and 26 gauge galvalume, galvanized, and painted are available by special order
- ▶ 24" wall panel coverage, 1/2" rib height
- ▶ 21-2/3" roof panel coverage, 1/2" rib height
- ▶ 3:12 slope minimum
- Applies over solid substrate with 30# felt underlayment
- Optional finish: Weathering Steel





